


SECURITY METAL PRODUCTS BLAST RESISTANT DOORS AND FRAMES MODEL BL

TYPICAL ELEVATION

2" Scheduled Door 2"
** Opening Width **

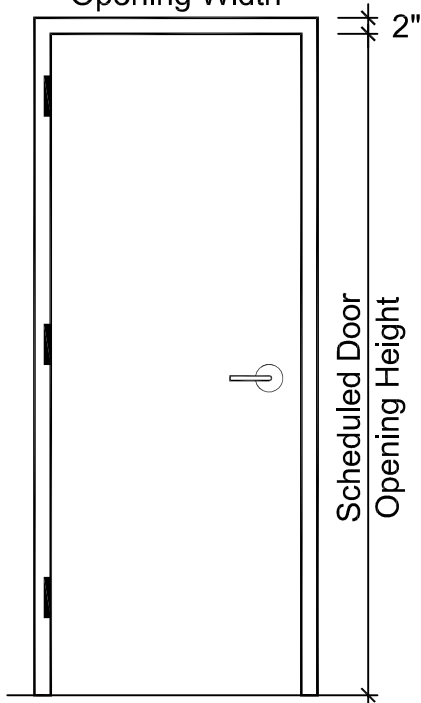

SPECIFICATIONS:

- 1) Doors have been engineered in compliance with and meet each of the major standards for blast resistance:
 - Dept. of Homeland Security
 - Dept, of Energy
 - Dept. of Defense
 - Anti-Terrorism Force Protection (ATFP)
 - General Services and Administration
 - Petroleum and Chemical Processing Industry Technology Cooperative (PIPITC)
- 2) Doors and frames will resist 4 PSI force static load, infinite impulse load. Door assembly may perform considerably better: +/- 30 static load and +/- 80 impulse load depending on product requirements.
- 3) Door edges are welded and seamless.
- 4) Frames are continuously welded.
- 5) Doors and frames are made from 14 Gauge material.
- 6) All doors are 1-3/4" thick.
- 7) Standard commercial hardware can be used.
- 8) Doors and frames are factory prime painted.

