



SECURITY METAL PRODUCTS MODEL NO. BR1-3 BULLET RESISTANT DOOR AND FRAME

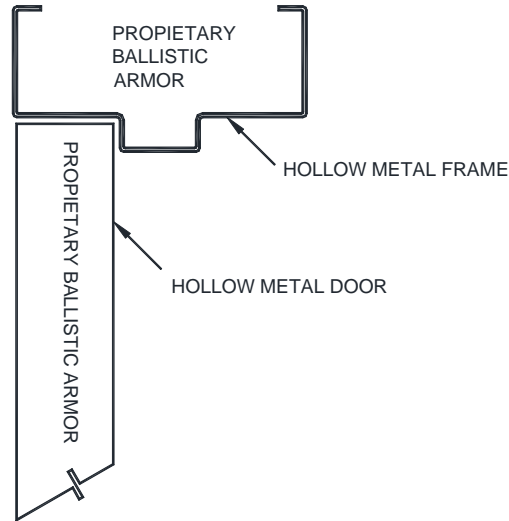

TYPICAL ELEVATION
2" Scheduled Door 2"
Opening Width

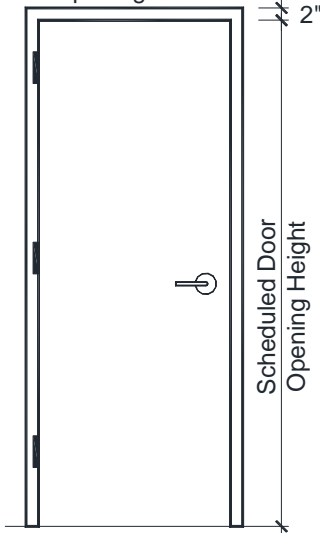

SPECIFICATIONS:

1. All exposed surfaces of door and frame to receive one coat of rust inhibitive prime paint.
2. Assembly is equipped with HM door, frame, and crated for shipment.
3. Nominal door thickness is 1 3/4". Door weight is 12 pounds per square foot.
4. Doors are 12 gauge steel face sheets.
5. Frames are 12 gauge steel
6. Standard SMP frame profile and anchor types may be used.
7. Door edges to be continuously welded and finished smooth.
8. Visions available up to half glass.
9. Available in conjunction with sound, stainless steel, blast, and/or lead lined requirements.

RATING	AMMUNITION	GRAIN	(G)	VELOCITY MINIMUM (FPS)	VELOCITY MINIMUM (MPS)	NO. OF SHOTS
UL Level 1	9mm Full Metal Copper Jacket with Lead Core	124	8	1175	358	3
UL Level 2	.357 Magnum Jacket Lead Soft Point	158	10.20	1250	381	3
UL Level 3	.44 Magnum Lead Semi-Wadcutter Gas Checked	240	15.60	1350	411	3

For the addition of visions, pairs, hardware preps, or other custom project requirements, please contact Security Metals Products.