



SECURITY METAL PRODUCTS MODEL NO. BR4-8 BULLET RESISTANT DOOR AND FRAME

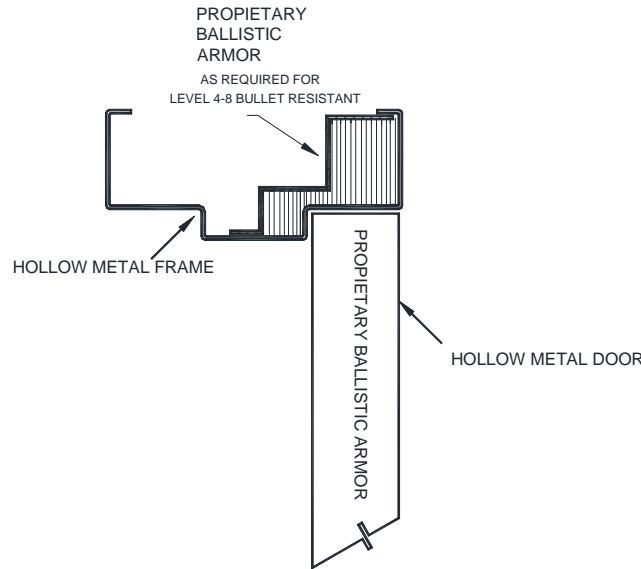

TYPICAL ELEVATION
2" Scheduled Door 2"
Opening Width

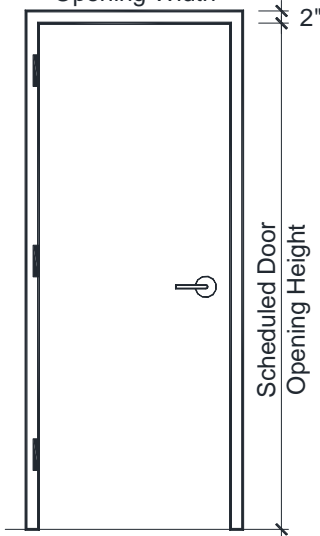

SPECIFICATIONS:

1. All exposed surfaces of door and frame to receive one coat of rust inhibitive prime paint.
2. Assembly is equipped with HM door, frame, and crated for shipment.
3. Nominal door thickness is 1 3/4". Door weight is 24 pounds per square foot.
4. Doors are 14 gauge steel face sheets.
5. Frames are 14 gauge steel
6. Standard SMP frame profile and anchor types may be used.
7. Door edges to be continuously welded and finished smooth.
8. Visions available up to half glass.
9. Available in conjunction with sound, stainless steel, blast, and/or lead lined requirements.

RATING	AMMUNITION	GRAIN	(G)	VELOCITY MINIMUM (FPS)	VELOCITY MINIMUM (MPS)	NO. OF SHOTS
UL Level 4	.30 Caliber Rifle Lead Core Soft Point	180	11.70	2540	774	1
UL Level 5	7.62 mm Rifle Lead Core Full Metal Copper Jacket Military Ball	150	9.70	2750	838	1
UL Level 6	9mm Full Metal Copper Jacket with Lead Core	124	8	1400	427	5
UL Level 7	5.56 Rifle Lead Core Metal Copper Jacket with Lead Core	55	3.56	3080	939	5
UL Level 8	7.62mm Rifle Lead Core Full Metal Copper Jacket Military Ball	150	9.70	2750	838	5

For the addition of visions, pairs, hardware preps, or other custom project requirements, please contact Security Metals Products.

ASSA ABLOY, the global leader in door opening solutions